
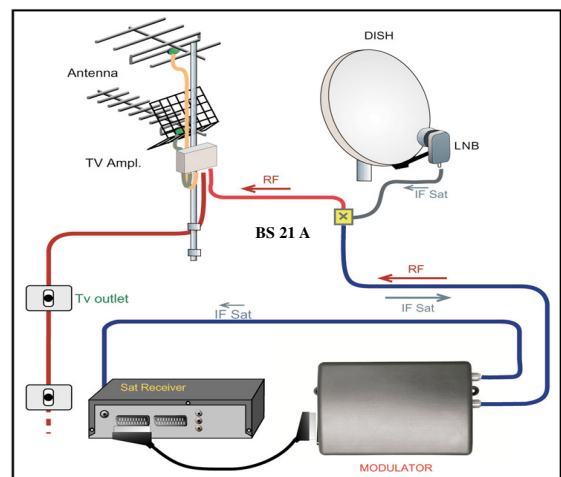


Audio Video Stereo Modulator with IR Receiver

- Programmable Modulator
- Audio stereo Hi-Fi
- Preserves Dolby Digital Surround encoding information
- Audio with Automatic Control Gain
- Double SCART connector
- Self powered
- Automatic TEST video signal
- RF output 90 dB μ V adjustable (0-20)
- Harmonics filter suppressor
- Selection of the output ch. by dip-switch
- Permits the mixing of the Terr. and SAT signals
- Crystal controlled 433 MHz transmitter
- RF ling test
- Attractive ABS box

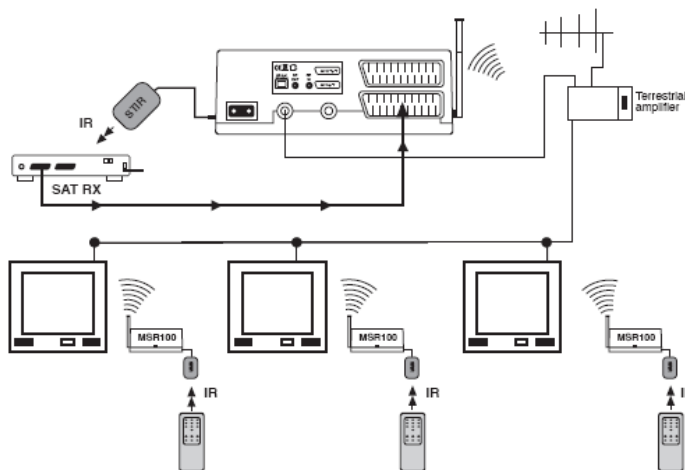

Technical specifications

RF

- Output level 90 dB μ V
- Auto mix 5...2150 MHz
- Ins. loss mix < 2 dB 5...2200 MHz
- Spuries in the channel - 65 dB
- Harmonics level - 55 dB

VIDEO

- Input level. 1 Vpp
- S/N ratio 50 dB
- Modulation deep 75%
- Input impedance 75 Ω
- Video modulation AM

AUDIO

- Input sens. 150 mVpp...3Vpp (ACG)*
- Audio couriers (PAL B/G) 5,5 MHz + 5,742 MHz
- Reemphasis. 50 μ S
- Freq. range 40...15.000 Hz
- Distortion < 0,5%
- Stereo System Pal B/G Zwei Tone

DIMENSION

- 200 X 120 X 40 mm

STANDARDS

PAL B/G, -PAL D/K
PAL I*, SECAM L/L*

*On request